

STR

SERIES

10-3000 kVA **3:3** **1-30 kVA** **1:1**

PHASE

PHASE

STATIC VOLTAGE STABILIZER



INDUSTRY



TRANSPORT



MEDICAL



TOWER




POWER FACTOR



SERVICE

Highly Reliable and Endurable Static Design


- + Microprocessor controlled Static design stabilizers automatically regulate and protect the loads against dangerous voltage changes.
- + Compatible with all load types and offering independent phase control, they deliver ultra-fast response times in correcting under / over voltages, sags and surges - making them ideal for highly sensitive / mission critical loads and applications.

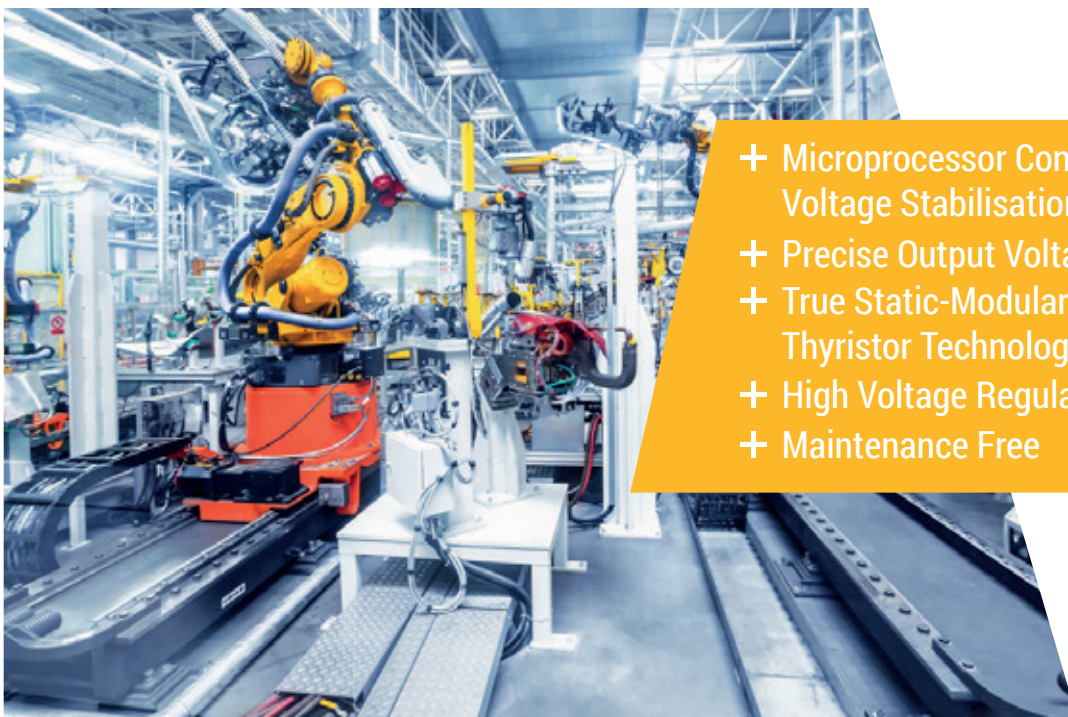

- + Microprocessor Controlled Voltage Stabilisation
- + Precise Output Voltage Accuracy
- + True Static-Modular Design with Thyristor Technology
- + High Voltage Regulation Speed
- + Maintenance Free

Standard Electrical Features

- Wide Input Voltage Range
- Precise Output Voltage Accuracy $\pm 1\%$ to $\pm 5\%$
- Ultra Fast Voltage Regulation (500V/s)
- True 32-bit Microcontroller Controlled
- High Efficiency $> 97\%$
- Independent Phase Regulation to Correct Voltage and Load Imbalance
- Electronic Protection Against Over Load, Low Voltage, High Voltage, Over Temperature, Over Current and Short Circuit
- Overload Protection up to 150%
- Fast Responsive to Voltage Surges
- User Friendly, Easy and Comprehensive LCD Display and Mimic Diagram

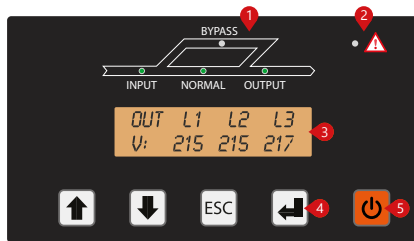

1. Input Led
Bypass Led
Normal Led
Output Led
2. Alarm/Warning Led
3. LCD Display
4. Menu Keys
5. On/Off Button

- Advanced Alarm Menu
- Manual Bypass
- Auto Restart when Mains Available
- 512 Events Log Memory (Opt.)
- Full Electronic Static Structure with No Moving Parts, Delivering a 'Maintenance Free' Voltage Regulation Solution
- Compact Design with High Quality Material and Minimum Malfunction Hazard
- Designed, Manufactured and Supplied to Comply with
- Fully CE Compliant and Labelled

Flexibility

- Available at any required input voltage value and range.
- Available at any required output voltage value and tolerance from $\pm 1\%$ to $\pm 5\%$.
- Output voltage can be adjusted by the LCD panel.
- Functionable with 50Hz and 60Hz.
- Optional MCCB can be added to the output to provide additional protection.
- Optional automatic by-pass unit can be added to the output.
- Isolation transformer or voltage changing auto-transformer can be added for both input and output.
- Indoor and outdoor special cabinets with various IP protection classes can be provided.
- Optional EMC-filters at both input and output.
- Optional high-voltage protection and surge arrester.
- Input and output terminals can be designed and located specially on the cabinet.
- Optional Modbus.




IP44, IP54, IP65 Cabinet Option Available

MICROPROCESSOR CONTROLLED THYRISTOR TECHNOLOGY

Based on high speed semiconductor (Thyristor) technology and all digital microprocessor control, STR Series Static Voltage Stabilizers continuously monitor the incoming supply. Should the incoming voltage rise or drop, the stabilizers will automatically control the output to ensure the voltage reaching the load equipment always remains constant at the requisite voltage.

Inbuilt spike protection ensures the load is continuously protected against harmful mains born high energy spikes and surges.

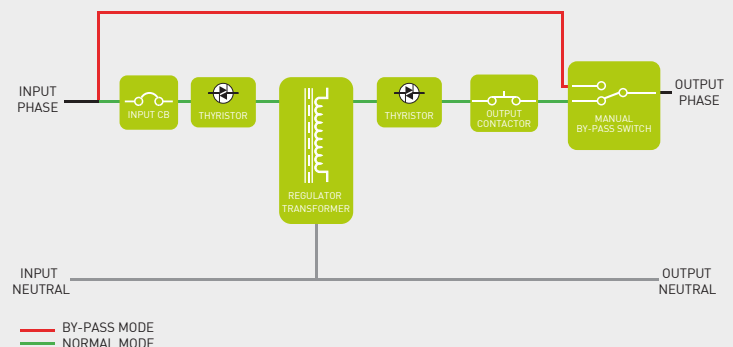

Static Voltage Stabilizer Single Line Diagram

MODEL																									
Capacity (kVA)		10	15	22,5	30	45	60	75	100	120	150	200	250	300	400	500	600	800	1000	1250	1600	2000	3000		
INPUT																									
In. Vol. Correct. Interval		275~450 VAC (Optional: 190V~485V)																							
Operation Frequency		50~60 Hz (±10%)																							
Line Input Protection		Overcurrent Thermic Fuse																							
OUTPUT																									
Output Voltage		380 VAC RMS ±3% (Std.)					380 VAC RMS ±5% (Optional 1% to 5%)																		
Overloading		10min 125% Load, 1min 150% Load, 10sec 200% Load, 20ms 500% Load																							
Correction Speed		500 Volt/sec																							
Upturn Period		20ms																							
Output Protection		Short Circuit, Overload, Overtemperature, Over and Low Voltage Protections																							
WORKING PRINCIPLE		Microprocessor Controlled, Full Automatic, Static, Semi Conductor Electronic Structure Maintenance Free																							
CONTROL PANEL																									
Display and Buttons		Load Level, Input-Output Voltage																							
Alert Message		Input Low/High, Output Low/High, Overtemperature																							
GENERAL																									
Efficiency		>97% (Full Load)																							
Mechanical Bypass		“Manually Controlled Line - PAKO SWITCH Selects Voltage Regulator” Switch Turn On/Off																							
Protection Level		IP20																							
Standard		TS EN 61000-6-2:2006, TS EN 61000-6-3:2007 (EMC), IEC60204-1+A1:2008 (LVD)																							
ENVIRONMENTAL																									
Operating Temperature		-10°C~50°C																							
Storage Temperature		-25°C~60°C																							
Relative Humidity		<90%, DIN (40040)																							
Altitude		<2000m																							
Noise Level		<50 dB				<55 dB			<58 dB			<58 dB					<63 dB								
DIMENSIONS & WEIGHT		10	15	22,5	30	45	60	75	100	120	150	200	250	300	400	500	600	800	1000	1250	1600	2000	3000		
Cabinet Dimensions (mm)	Width	400				500			555			1400					2280				2900			3300	
	Depth	600				650			825			850					1110				1200			1200	
	Height	1187				1333			1559			1637					1730				2000			2000	
Weight (Kg)		80	95	112	120	175	203	233	277	320	369	639	705	775	857	930	1670	1800	1890	2110	2820	3900	5500		

Deltron reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Deltron products previously or subsequently sold. Deltron does not guarantee the items of the accuracy and completeness.

MODEL									
Capacity (kVA)		1	2	3	7,5	10	15	20	30
INPUT									
In. Vol. Correct. Interval		110 ~265 /120~230 / 145~245 / 160~250 VAC							
Operation Frequency		50~60 Hz (±10%)							
Line Input Protection		Overcurrent Thermic Fuse							
OUTPUT									
Output Voltage		220 VAC RMS ±3% (Std.)	220 VAC RMS ±5% (Optional 1% to 5%)						
Overloading		10min 125% Load, 1min 150% Load, 10sec 200% Load, 20ms 500% Load							
Correction Speed		500 Volt/sec							
Upturn Period		20ms							
Output Protection		Short Circuit, Overload, Overtemperature, Over and Low Voltage Protections							
WORKING PRINCIPLE		Microprocessor Controlled, Full Automatic, Static, Semi Conductor Electronic Structure Maintenance Free							
CONTROL PANEL									
Display and Buttons		Load Level, Input-Output Voltage							
Alert Message		Input Low/High, Output Low/High, Overtemperature							
GENERAL									
Efficiency		>97% (Full Load)							
Mechanical Bypass		"Manually Controlled Line - PAKO SWITCH Selects Voltage Regulator" Switch Turn On/Off							
Protection Level		IP20							
Standard		TS EN 61000-6-2:2006, TS EN 61000-6-3:2007 (EMC), IEC60204-1+A1:2008 (LVD)							
ENVIRONMENT									
Operating Temperature		-10°C~50°C							
Storage Temperature		-25°C~60°C							
Relative Humidity		<90%, DIN (40040)							
Altitude		<2000m							
Noise Level		<50 dB							
DIMENSIONS & WEIGHT									
Dimensions (mm)	Width	192	260			430			
	Depth	361	453			596			
	Height	352	416			777			

Deltron reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Deltron products previously or subsequently sold. Deltron does not guarantee the items of the accuracy and completeness.